

FIG. 1

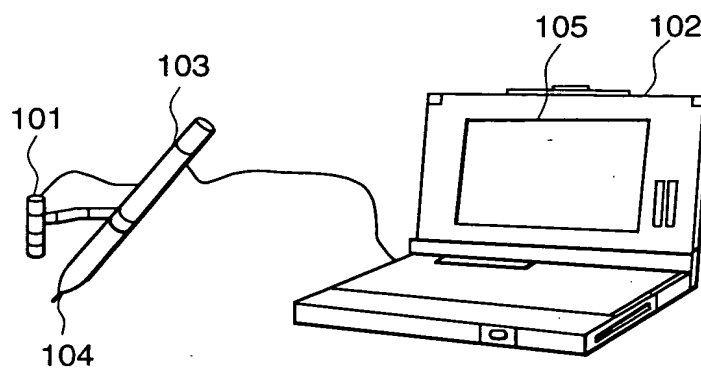


FIG. 2

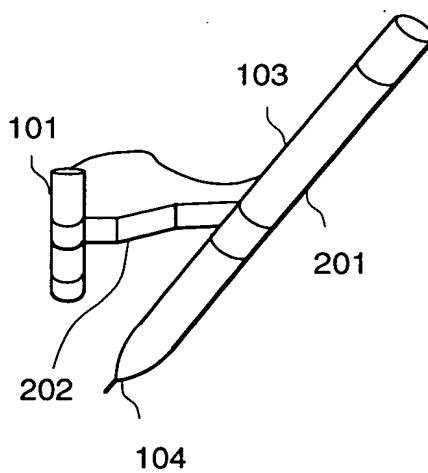


FIG. 3




FIG. 4

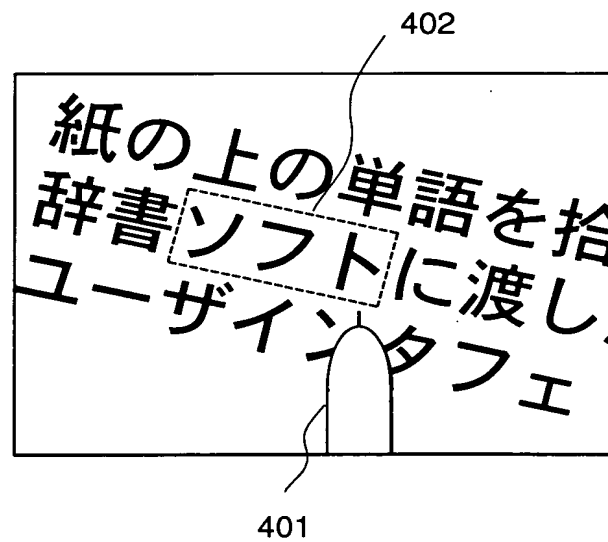


FIG. 5

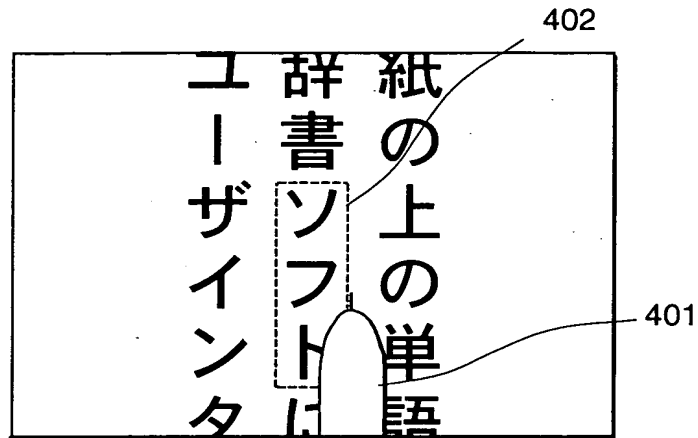


FIG. 6




FIG. 7

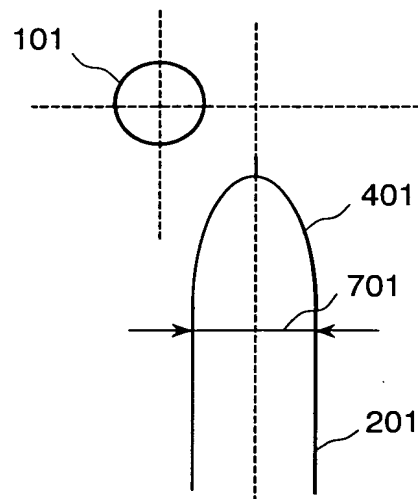
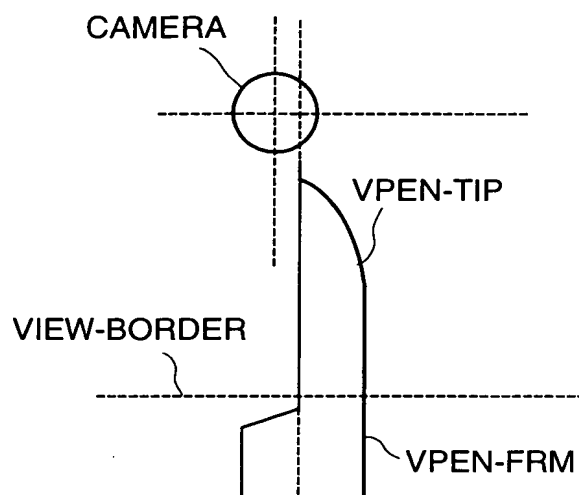
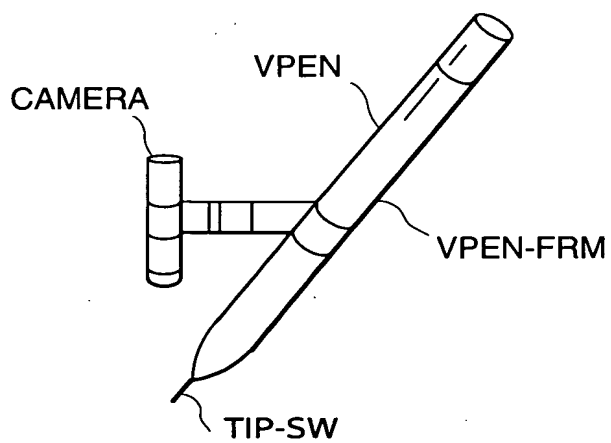

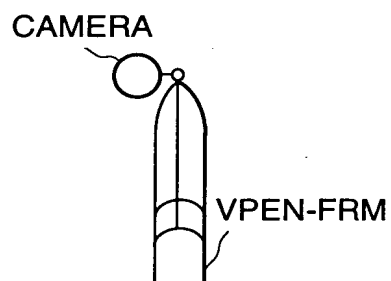


FIG. 8*FIG. 9*

5 / 17

FIG. 10**FIG. 11****FIG. 12**

PATTERN 1

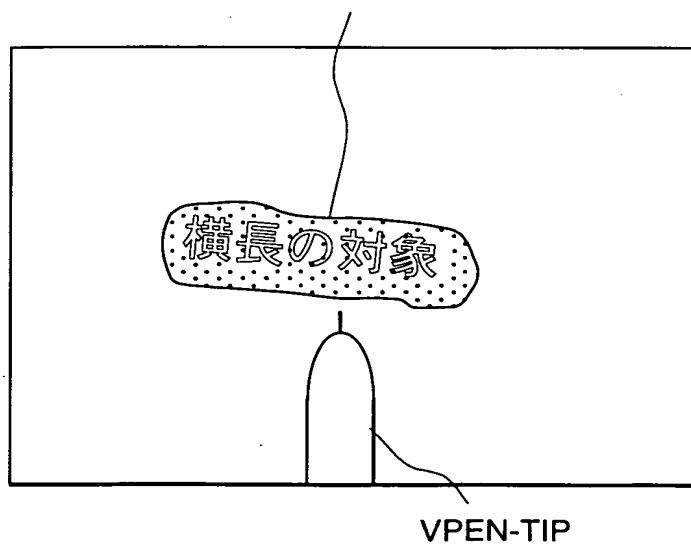


FIG. 13

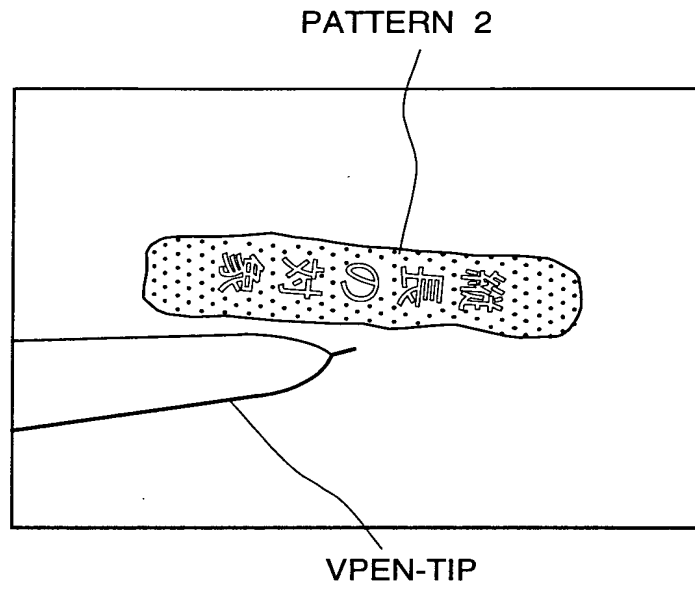
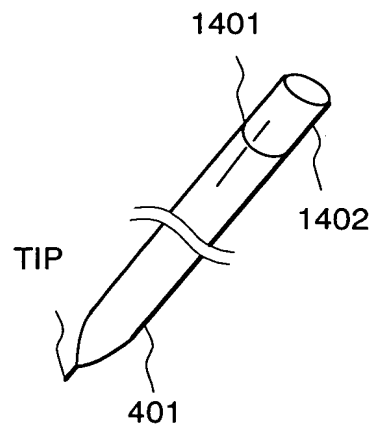


FIG. 14



7/17

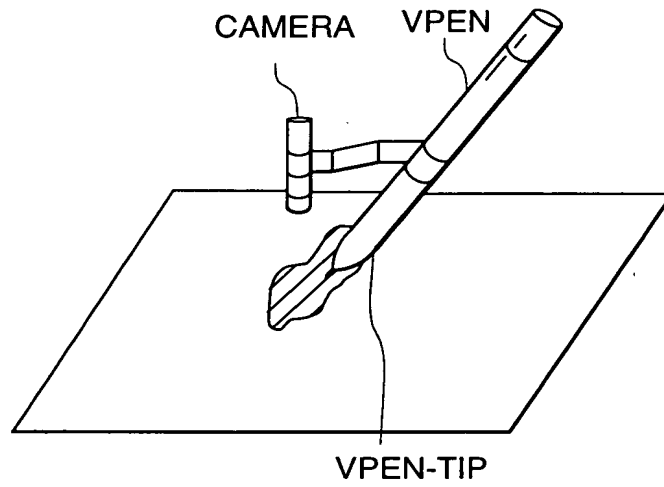
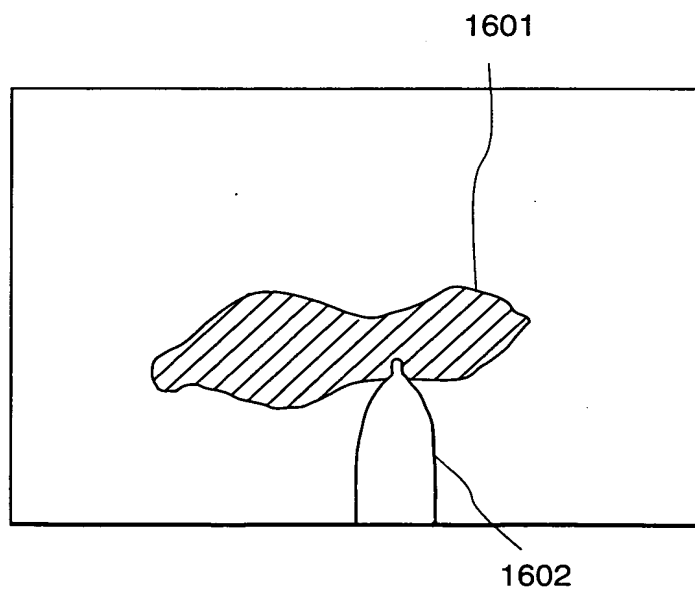
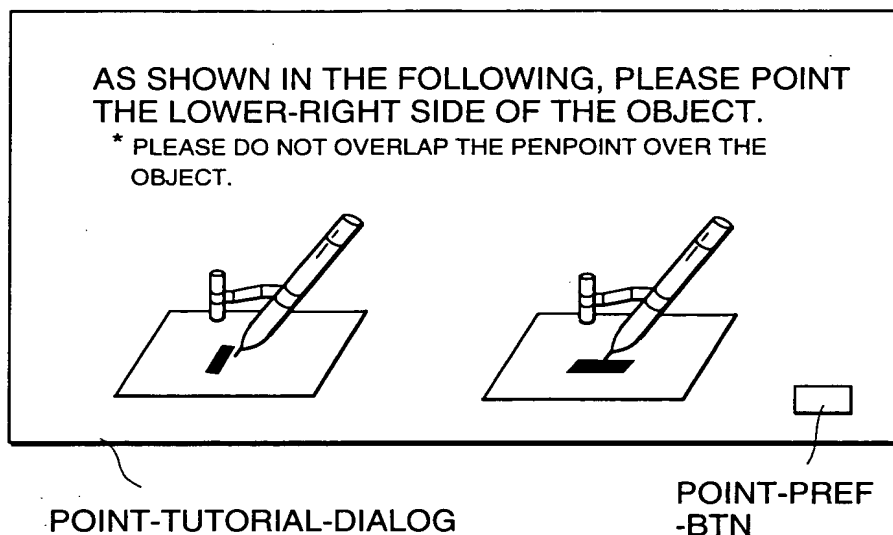
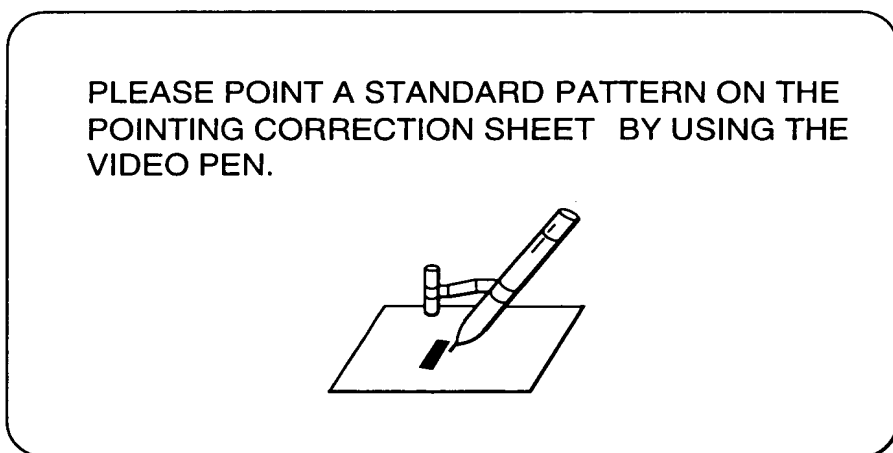
FIG. 15**FIG. 16**

FIG. 17*FIG. 18*

9/17

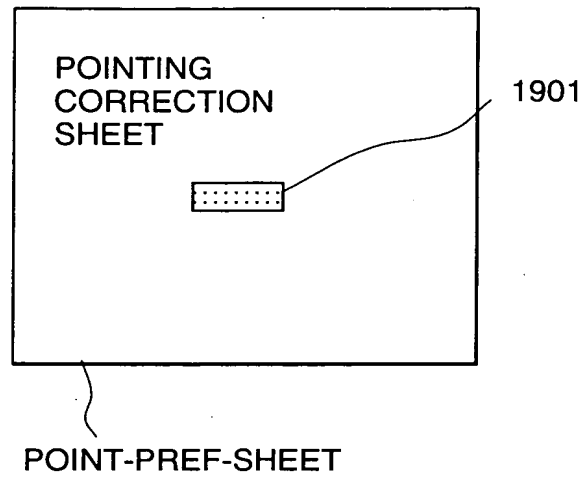
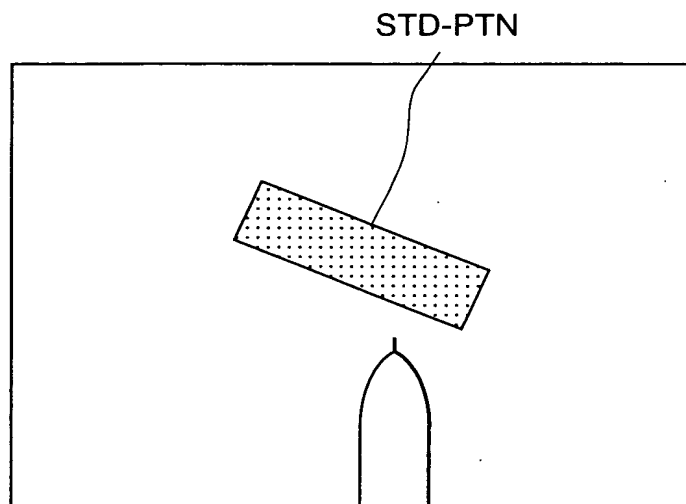
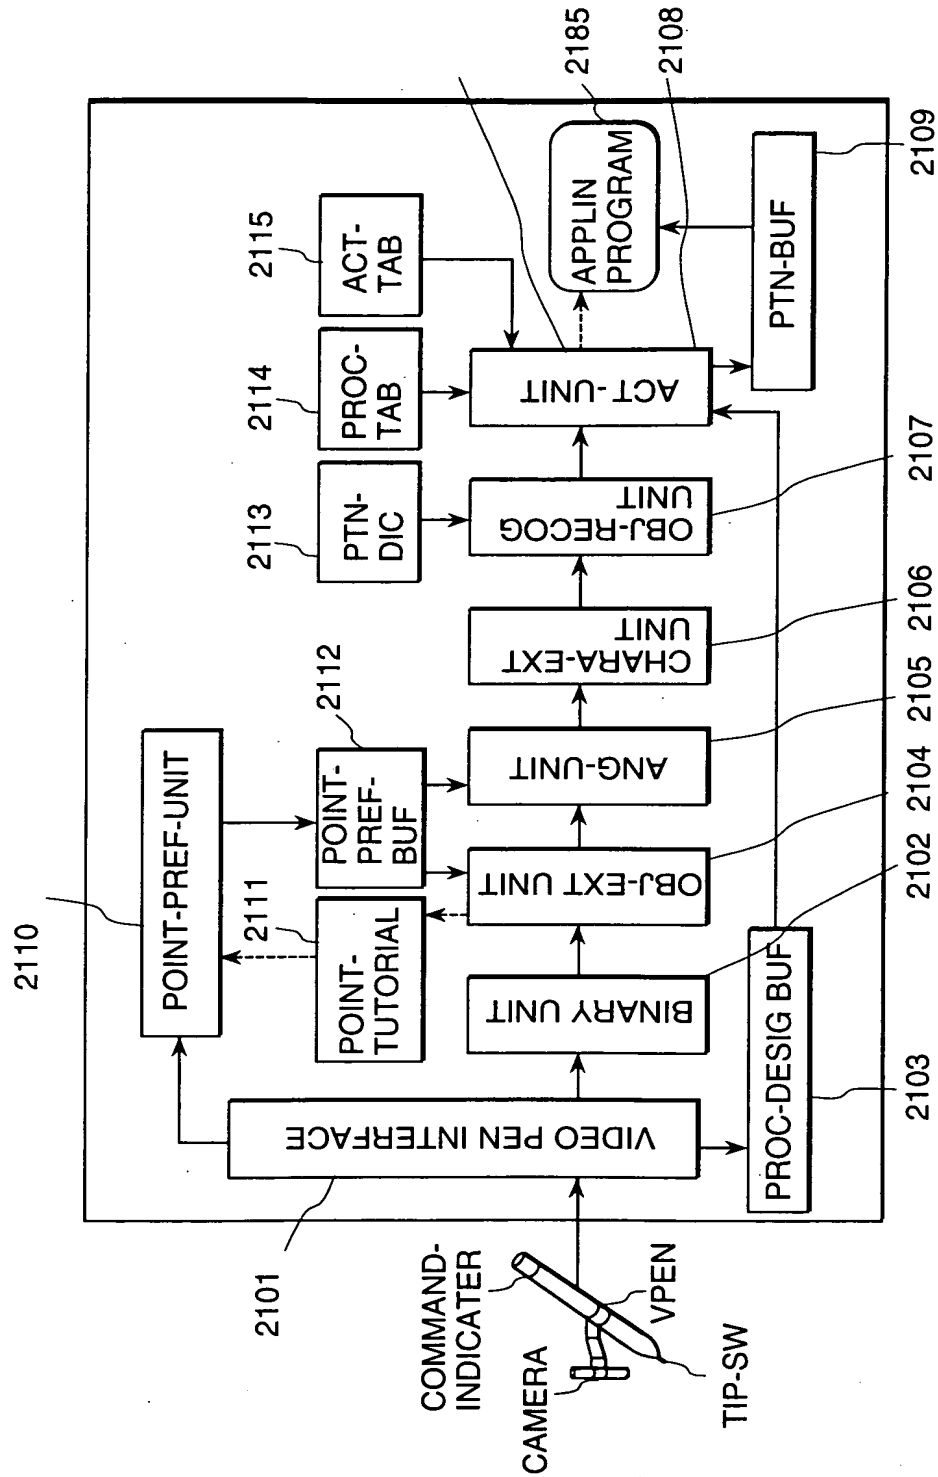
FIG. 19*FIG. 20*

FIG. 21



11 / 17

FIG. 22



FIG. 23

OBJECT MINIMUM DIISTANCE	18BITS	2301
STANDARD ANGLE	32DEG.	2302

FIG. 24

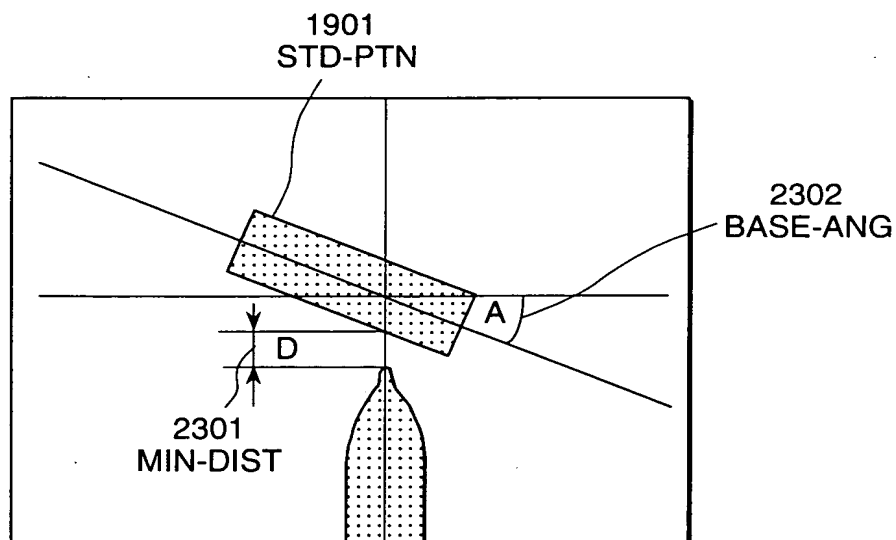
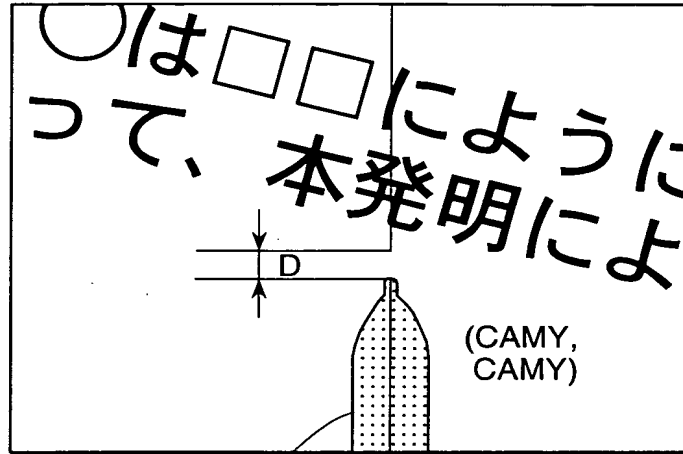


FIG. 25

(0,0)



VPEN-TIP

FIG. 26

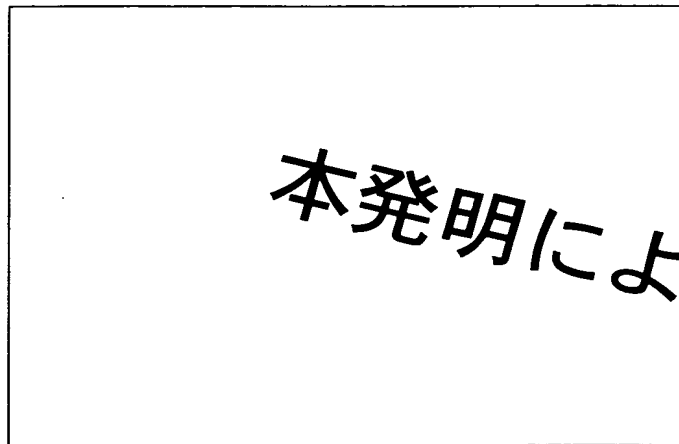


FIG. 27

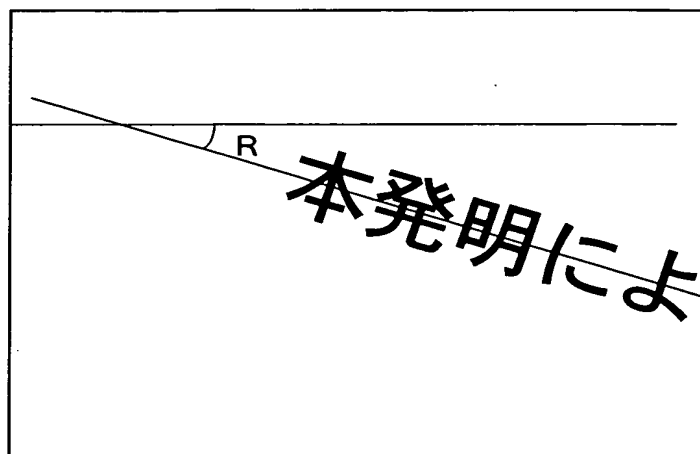


FIG. 28

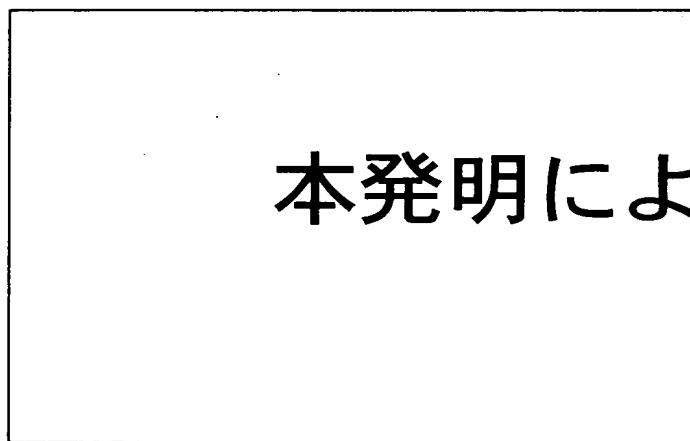


FIG. 29

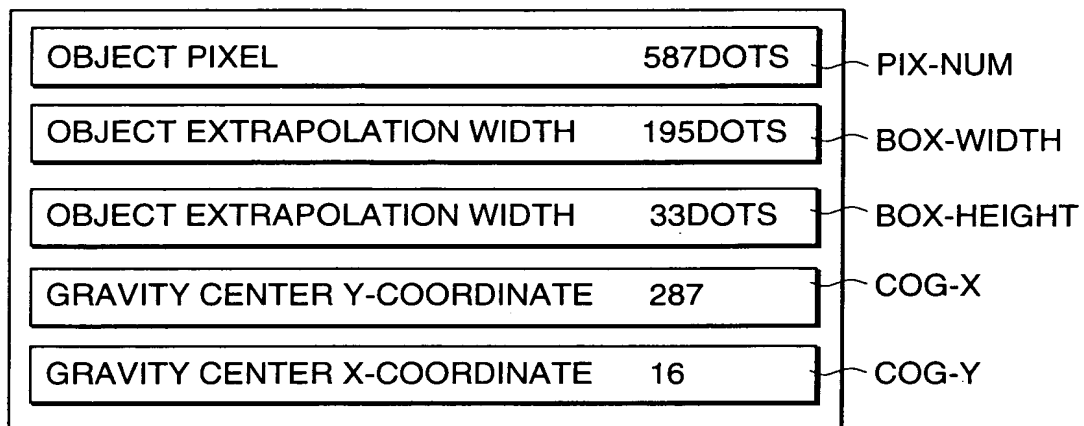


FIG. 30

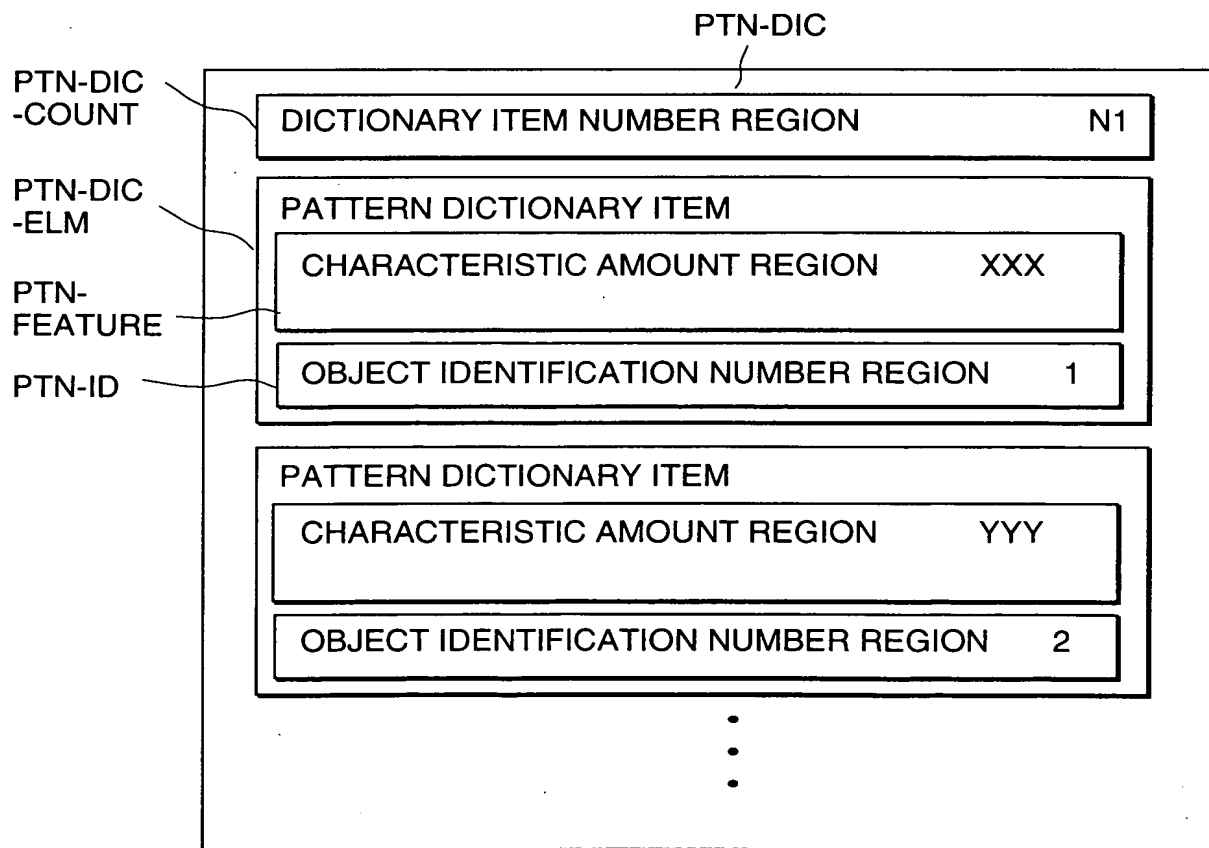


FIG. 31

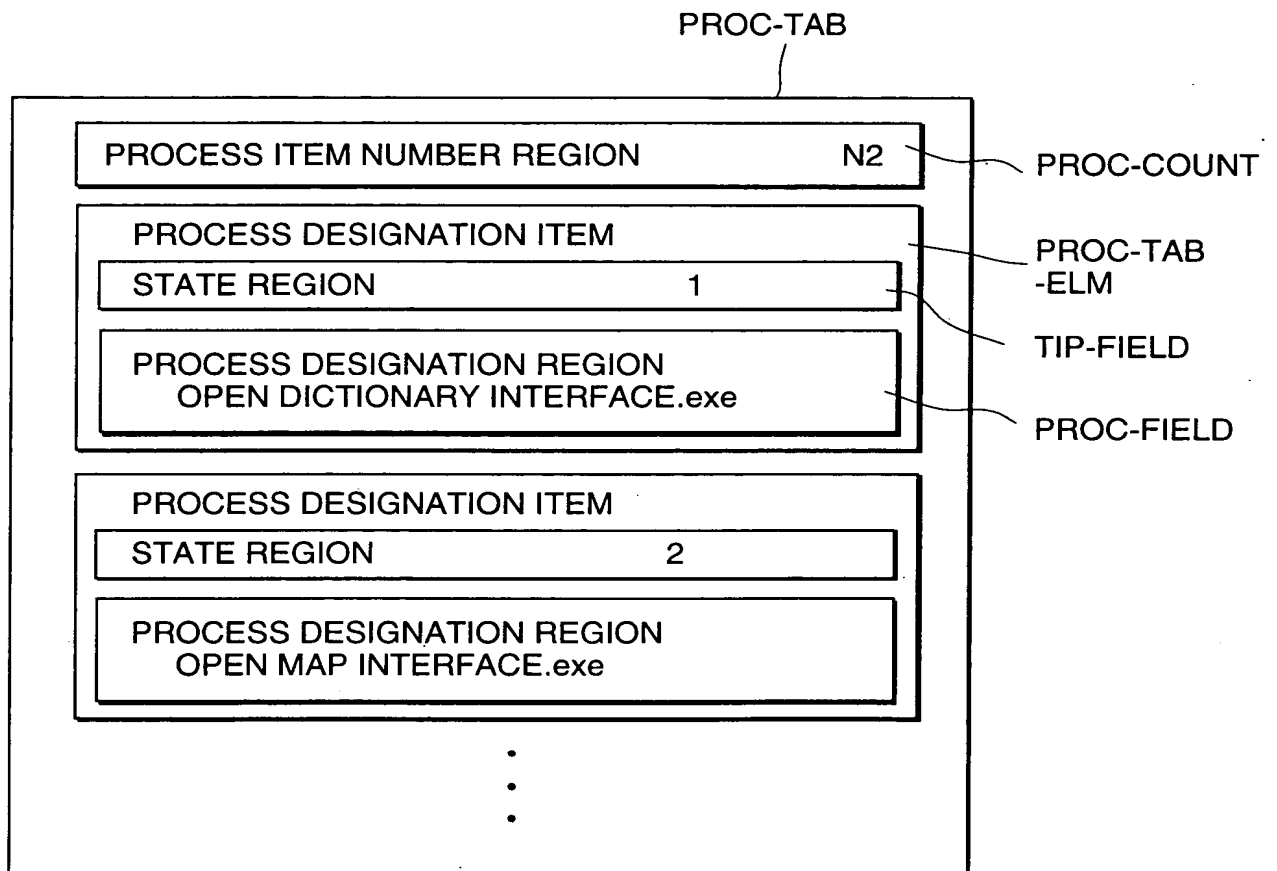


FIG. 32

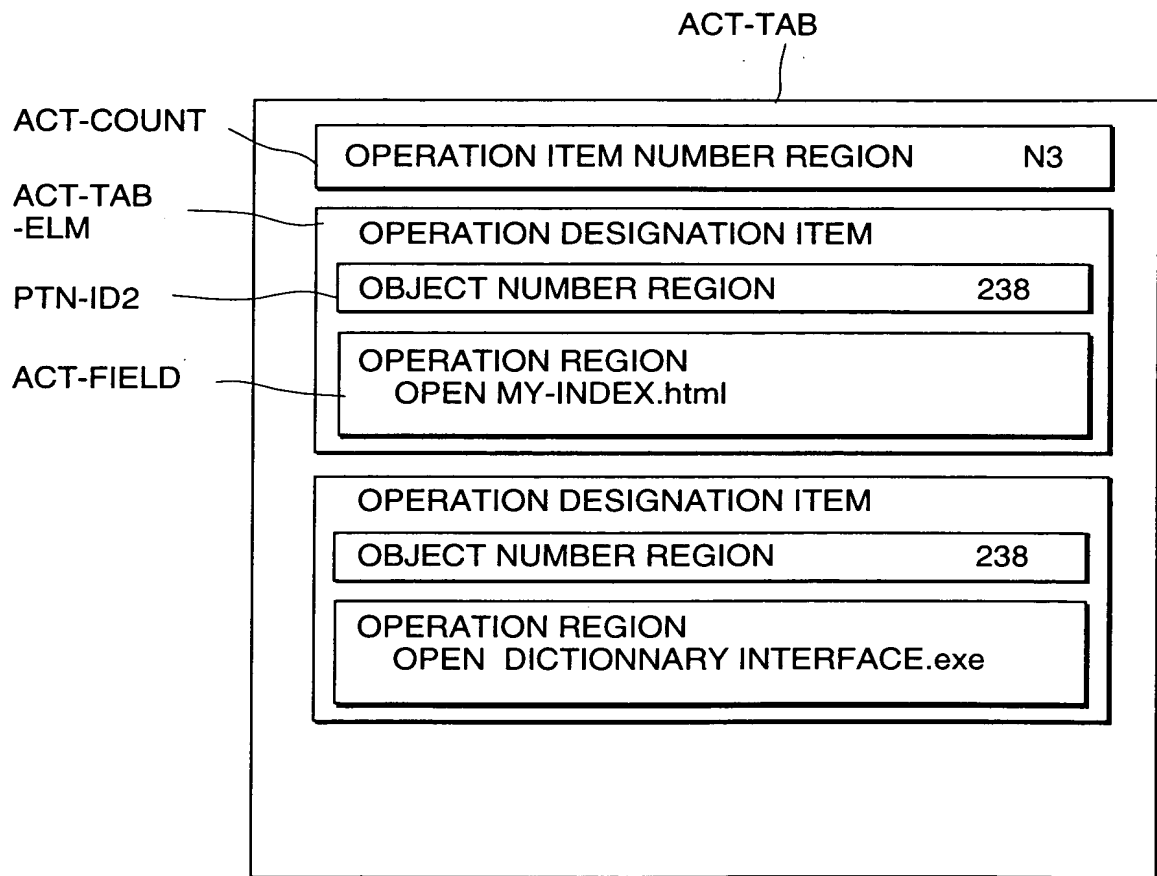


FIG. 33

